

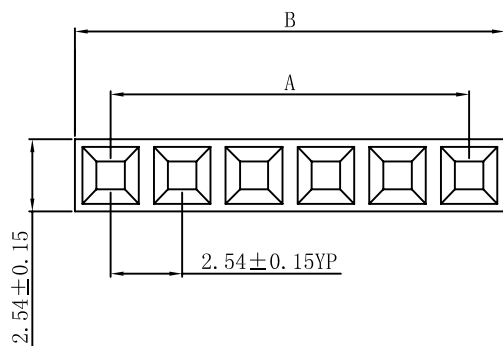
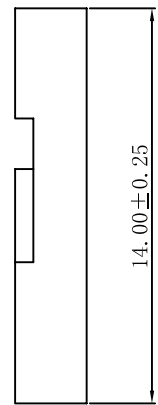


RoHS

REVISION DATE		
ITEM	DESCRIPTION	DATE
A	Issue	

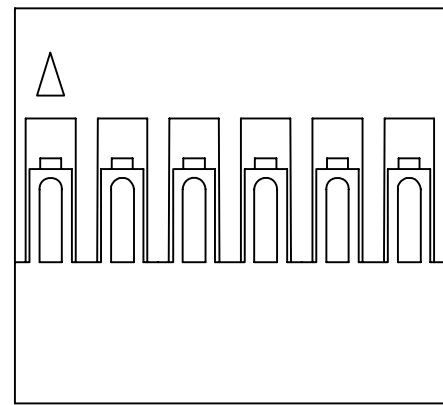

- SPECIFICATION**
- Voltage rating: 250V AC, DC
 - Current Rating: 3.0A, AC, DC
 - Withstand voltage: 800V AC/minute
 - Contact resistance: 20mΩ max
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C ~ +85° C
- HOUSING**
- Material: PBT UL94V-0
 - Color: Black

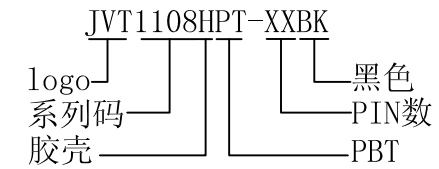

Poles	DIM. A	DIM. B	Poles	DIM. A	DIM. B
1	--	2.54	21	50.80	53.34
2	2.54	5.08	22	53.34	55.88
3	5.08	7.62	23	55.88	58.42
4	7.62	10.16	24	58.42	60.96
5	10.16	12.70	25	60.96	63.50
6	12.70	15.24	26	63.50	66.04
7	15.24	17.78	27	66.04	68.58
8	17.78	20.32	28	68.58	71.12
9	20.32	22.86	29	71.12	73.66
10	22.86	25.40	30	73.66	76.20
11	25.40	27.94	31	76.20	78.74
12	27.94	30.48	32	78.74	81.28
13	30.48	33.02	33	81.28	83.82
14	33.02	35.56	34	83.82	86.36
15	35.56	38.10	35	86.36	88.90
16	38.10	40.64	36	88.90	91.44
17	40.64	43.18	37	91.44	93.98
18	43.18	45.72	38	93.98	96.52
19	45.72	48.26	39	96.52	99.06
20	48.26	50.80	40	99.06	101.60

投影 (PROJECT)		公差 (TOLERANCE)
单位 (UNIT)	mm	0 ±0.40
比例 (SCALE)	FIT	0.0 ±0.30
版本 (EDITION)	A	0.00 ±0.20
日期 (DATE)	2013 07 24	0.000 ±0.05

东莞市乔业电子有限公司
DONG GUAN CHYAO YEE (JVT) CONNECTORS CO., LTD.

绘图 (DRAWN)	TONY	品号 (PART NO)	JVT1108HPT-XXBK	页次 (PAGE)	
审核 (CHECKED)	CHEN	图号 (DRAW NO)	065-1108-01	1/1	
核准 (APPROVE)		品名 (NAME)	杜邦2.54单排HSG		